
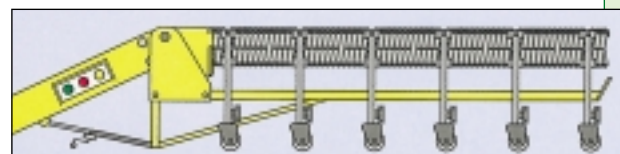


MOBILE TWIN BELT VEHICLE LOADER

Versatile and mobile powered twin belt conveyor suitable to load and unload vehicles. Also able to reach mezzanine floors. Manufactured to the highest specification as follows:-

- Load capacity: 50kgs per metre.
- Two ply, high grip PVC belt with vulcanised joint.
- Standard speed 20m per minute.
- Chassis heavy gauge fabricated hollow steel section.
- Boom constructed folded steel flat slider bed.
- Drive .375kw flange mounted gearbox.
- Supply 1 phase 240v.
- Control 24 volt IP65
- Colour yellow RAL 1003 standard, other colours available.
- Height adjustment:-
Main boom manual hydraulic
Infeed boom screwjack
- Controls stop/start reverse top & bottom.
- Fully underguarded.

REF	Dimensions						Belt Width mm	
	A	B	C	D	E	F	400	600
VL1	2500	1000	2100	900	1150	600	£5941.07	£6193.34
VL2	2500	1500	2100	900	1550	200	£6053.84	£6330.51
VL3	3000	1000	2400	900	1150	600	£6053.84	£6330.51
VL4	3000	1500	2400	900	1550	200	£6166.60	£6467.69
VL5	3500	1500	2500	900	1550	200	£6279.36	£6604.86

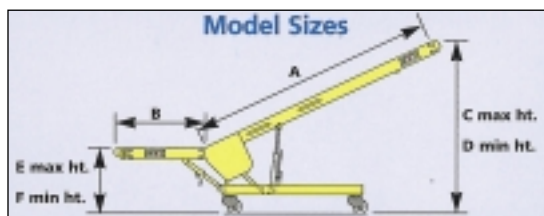

REF	Model Type	Expanded Length	PRICE
ETW-4	PVC Skatewheel	4m	£1592.83
ETW-5.5	PVC Skatewheel	5.5m	£1852.06
ETW-7	PVC Skatewheel	7m	£2111.30
ETR-4	PVC Roller	4m	£1648.63
ETR-5.5	PVC Roller	5.5m	£1928.79
ETR-7	PVC Roller	7m	£2210.11

ECONO LOADER

Versatile mobile single boom powered belt conveyor to load and unload vehicles.

- Load capacity 50kgs per metre.
- Standard speed 20m per minute.
- Two ply high grip PVC belt with vulcanised joint.
- Chassis heavy gauge hollow steel sections.
- Boom constructed folded steel flat slider bed.
- Drive .375 flange mounted gearbox.
- Supply 3 Phase 415V.
- Control 24 volts IP65
- Standard yellow Ral 1003, other colours to order.
- Height adjustment boom manual hydraulic.
- Controls: Stop, start, Reverse top & bottom
- Available belt widths 400 & 600mm
- Standard boom penetration at least 2m
- Single phase available to order.
- Standard heights: Approx 750mm Fixed end, 1300/2500mm Adjustable end.

REF	Belt Width mm	PRICE
EC04	400	£5461.43
EC06	600	£5786.93



To achieve greater penetration into the vehicle add the sections of lightweight gravity from our System 25 Range

