



Our expert says

Get free help planning your racking and shelving project

PALLET RACKING TYPE	LOW INVESTMENT	HIGH STORAGE DENSITY	EASY TO ADJUST & ADAPT	INDIVIDUAL PALLET ACCESS	HANDLING MIXED ARTICLES	FIFO* POSSIBLE	BAY HEIGHT	LOADING CAPACITY	COMPATIBLE FORKLIFT TRUCK TYPE
STANDARD AISLE	✓✓		✓✓	✓✓	✓✓	✓✓	≤7500mm	≤1000kg UDL per pallet ≤8000kg SWL per bay	Various
NARROW AISLE	✓	✓	✓	✓✓	✓✓	✓✓	≤12000mm	≤1000kg UDL per pallet ≤12000kg SWL per bay	VNA trucks (wire guided or guide rails)
DRIVE IN	✓	✓✓					≤10000mm	≤1500kg UDL per pallet	Reach truck / counter-balanced forklift
PALLET SHUTTLE SYSTEM	✓	✓✓				✓✓	≤12000mm	≤1500kg UDL per pallet	Various
PALLET ROW		✓✓				✓✓	≤10000mm	≤1000kg - 1250kg UDL per pallet	Reach truck / counter-balanced forklift
PUSH-BACK		✓			✓		≤10000mm	≤1000kg - 1250kg UDL per pallet	Reach truck / counter-balanced forklift
MOBILE (POWER RACKS)	✓	✓✓	✓	✓✓	✓✓	✓✓	≤10000mm	≤1000kg UDL per pallet ≤12000kg SWL per bay	Various

✓ = good option

✓✓ = best option

*FIFO First in first out




Standard Aisle



Drive-in System



Shuttle System

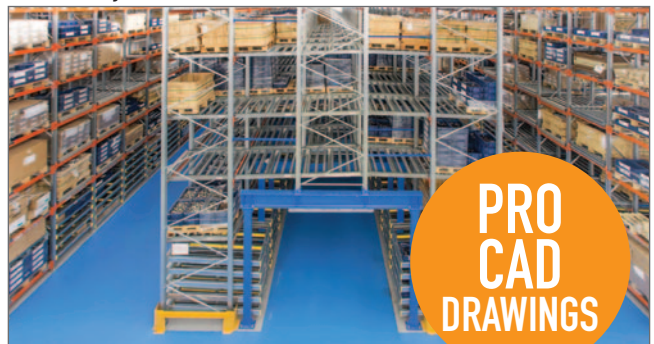

Push Back System